



VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2007-07-18

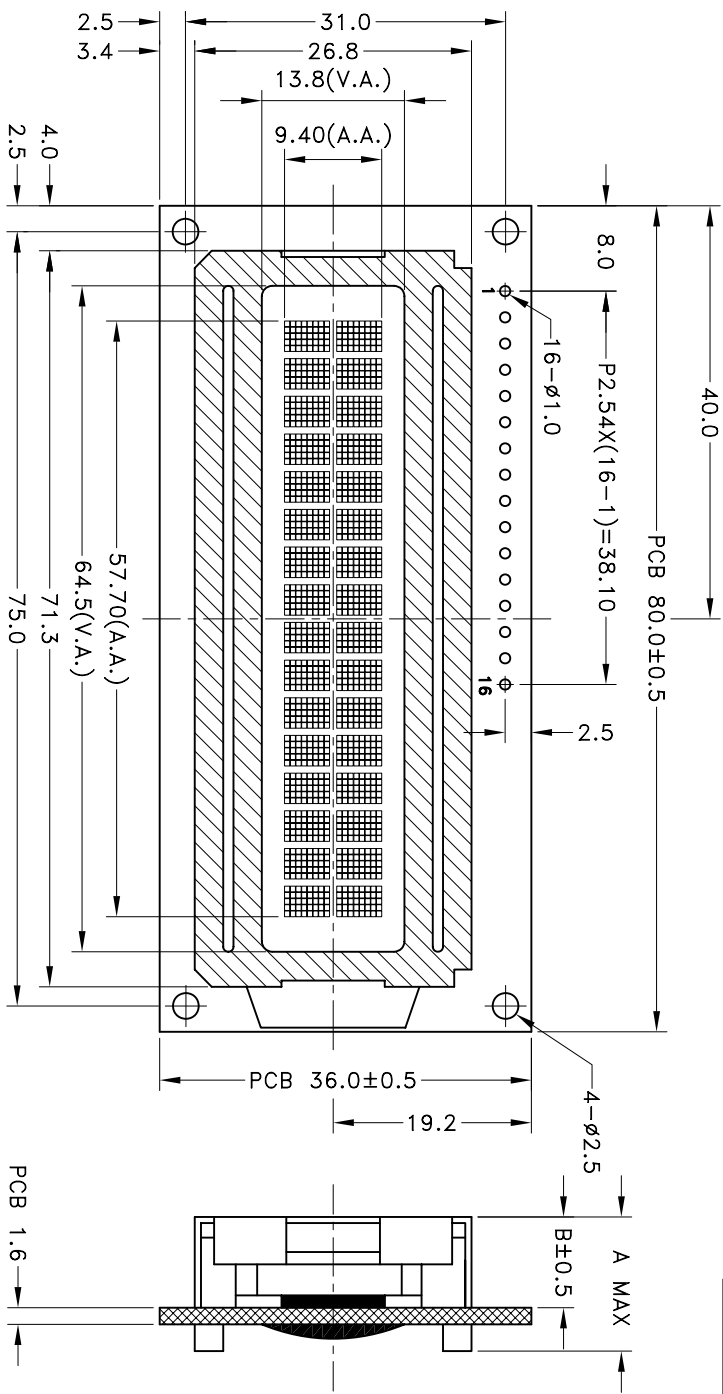

TYPE	A	B
LED B/L	13.5	8.9

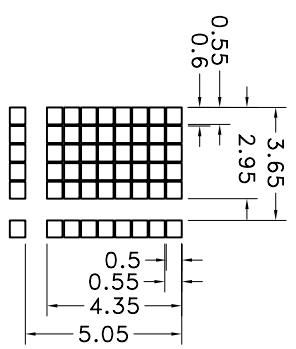

DETAIL DOTS
SCALE 3:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

VIEWING

SPECIFICATIONS

- DISPLAY TYPE: STN/TRANSMISSIVE/NEGATIVE/BLUE
- LCD DRIVING VOLTAGE: 5.0V
- LOGIC VOLTAGE: 5.0V
- VIEWING DIRECTION: 6 O'CLOCK
- OPERATING TEMP: -10° C~60° C
- STORAGE TEMP: -20° C~70° C
- DRIVE MODE: 1/16 DUTY, 1/5 BIAS
- BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V
- CONTROL/DRIVE IC: SPLC780D-001B-C/SPLC100A-C
- OTHER:

NOTE:

MECHANICAL TOL.±0.3 UNLESS SPECIFIED

DESCRIPTION:

C/D

SCALE: FIT	TINSHARP	TINSHARP
SHEET: 1 OF 1	ELECTRONICS CO.,LTD.	MODEL
PROJECTION	TC1602A-09T	SERIAL NUMBER
UNIT: mm	CHK:	DWN:
APP:	DATE:	DATE:
DATE:		